

# SUBMERSIBLE PUMPS

## Drainage & Vortex Submersibles

### SP SERIES

SP60-1A



SP80-1A



EURO RANGE

Drainage pump for emptying pits and cisterns, for gardening; completely constructed in anti-corrosive material; brass insert on the delivery opening.

### CONSTRUCTION FEATURES



<b>Pump body</b>	Polypropylene
<b>Impeller</b>	Noryl®
<b>Mechanical seal</b>	Double lip seal
<b>Motor shaft</b>	Stainless steel AISI 416 with ceramic bush
<b>Passage of solids</b>	Ø Max 7 mm (SP) Ø Max 15 mm (SPV)
<b>Depth of immersion</b>	Max 5 m
<b>Liquid temperature</b>	0 - 40 °C
<b>Cable</b>	H07 RNF, 10 m
<b>A</b>	Float switch

### MOTOR

<b>2 Pole induction motor</b>	1~ 240V-50Hz, With thermal protection
<b>Insulation class</b>	F
<b>Protection degree</b>	IP68

Code	Description
SP60-1A	HYJET 400 Watt 240V Poly Drainage Pump with Float Switch
SP80-1A	HYJET 800 Watt 240V Poly Drainage Pump with Float Switch

Type		W	Amps		Q (m³/h - l/min)					
1~	3~		1~	3~	0	3	6	9	12	15
			1x230V	3x400V	0	50	100	150	200	250
			50 Hz	50 Hz	H (m)					
SP60-1A		400	2.1		8.5	4.7				
SP80-1A	SP 80 T	800	3.7	1.8	10.3	9.1	7.8	6.3	4-	

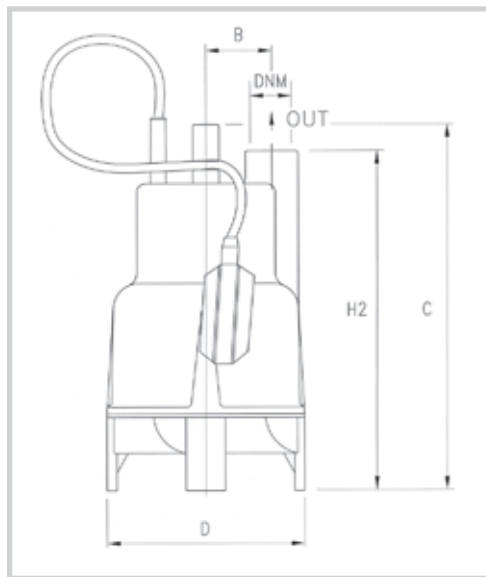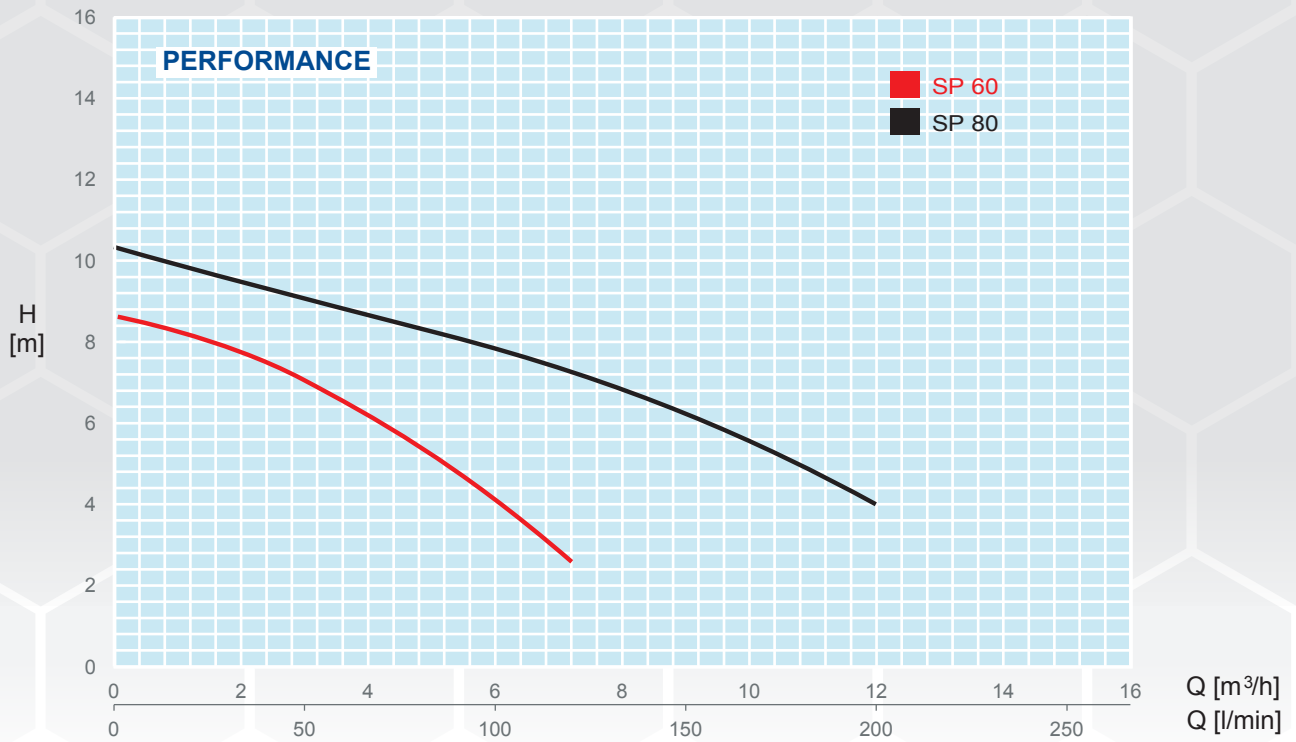

Type	Dimensions (mm)					Kg
	B	C	D	H2	DNM	
SP60-1A	50	250	150	230	1" G	4.2
SP80-1A	55.5	296	176	276	1 1/4 G1	8.5